

„MEŽA UN KOKSNES PRODUKTU PĒTNIECĪBAS UN ATTĪSTĪBAS INSTITŪTS” SIA
VAT No. LV 43603022749
Dobeles iela 41, Jelgava, LV-3001, Latvia
Phone +371 63010605 * E-mail meka@e-koks.lv * Web www.e-koks.lv



Test Report No. 8844-2/2024

Forest and Wood Products Research and Development Institute
Testing Laboratory

Customer: Helland Baltic OÜ
Registration number: 12570665
Customer address: Hapvali, Nõmme küla Haapsalu linn Lääne maakond 90439, Estonia

Manufacturer: Helland Baltic OÜ
Registration number: 12570665
Manufacturer address: Hapvali, Nõmme küla Haapsalu linn Lääne maakond 90439, Estonia

Owner of the test report: Helland Baltic OÜ
Registration number: 12570665
Owner address: Hapvali, Nõmme küla Haapsalu linn Lääne maakond 90439, Estonia

Date of the order: 16.11.2023.

Testing was done in conformity with contract No.: 124-10/23 MV

Test performed at: Forest and Wood Products Research and Development Institute Ltd, Dobeles street 41, LV-3001, Jelgava, Latvia.

1 Order content:

Testing in accordance with Standard:

- EN 1728:2012 /AC:2013 “Furniture - Seating - Test methods for the determination of strength and durability”.
- EN 1022:2023 “Furniture - Seating - Determination of stability”

Following the requirements of Standards:

- EN 16139:2013 /AC:2013 “Furniture - Strength, durability and safety - Requirements for non-domestic seating”, Test parameters L2.

2 Information provided by customer about delivered test specimen:

- Test sample: Pan bariatric chair w/armrests.
- Name of the sample: HB6870.
- Type of the material: Solid oak material is used as the frame of the chair (including armrests). The backrest and seat plate are made of bent birch plywood. Seat is upholstered and covered with the textile. Foam is used as a cushioning material in the on the seat plate.
- Sample dimensions: General width 710,00 general height 850.00, general depth 570.00.
- Sample production date: 08.10.2023.
- Sample production place: Hapvali, Nõmme küla Haapsalu, Läänemaa 90439 Eesti
- Sample manufacturer: Helland Baltic OÜ
- Date of sampling: 15.11.2023.
- Sampling place: Hapvali, Nõmme küla Haapsalu, Läänemaa 90439 Eesti
- Sampling done by: Helland Baltic OÜ
- Procedure of sampling: The sample is taken from the warehouse of ready production
- Other information: Testing according to EN 16121, Test Severity 2

3 Laboratory description of the specimen and test method:

- Test sample: Chair.
- Laboratory number for sample: 8844-2.
- Test standard: EN 1728:2012 /AC:2013 and EN 1022:2023.
- Test sample delivered: 16.11.2023.
- Test sample delivered by: Courier.
- Test sample test date: 11.12.2023. – 11.01.2024.



Figure 1: Pan bariatric chair w/armrests.
 “HB6870”



Figure 2: Front view.

4 Description of the delivery condition of the unit:

- Test specimen delivered assembled. Good condition, no defects.
- The test specimen has been stored in indoor ambient conditions for at least 24 h immediately prior to testing.
- The tests are carried out in indoor ambient conditions at a temperature between 15 °C and 25 °C.

5 Test results:

Table 1

| Requirements of EN 16139:2013 | Test parameters according to EN 1728:2012 /AC:2013; EN 1022:2023 | Requirement fulfilled (+) Requirement not fulfilled (-) |
|--|--|--|
| 1 | 2 | 3 |
| 4 Safety, EN 16139:2013 | | |
| <p>EN 16139:2013, (4.1) General</p> <p>- The seating shall be so designed as to minimize the risk of injury to the user. All accessible parts shall be so designed that physical injury and damage are avoided. This requirement is met when:</p> <ul style="list-style-type: none"> a) accessible corners are rounded or chamfered; b) the edges of the seat, back rest and arm rests which are in contact with the user when sitting in the chair are rounded or chamfered; c) the edges of handles are rounded or chamfered in the direction of the force applied; d) all other edges are free from burrs and rounded or chamfered; e) the ends of hollow components are closed or capped. <p>Movable and adjustable parts shall be designed so that injuries and inadvertent operation are avoided. It shall not be possible for any load bearing part of the seating to come loose unintentionally. All parts which are lubricated to assist sliding shall be designed to protect users from lubricant stains when in normal use.</p> | | + |
| <p>EN 16139:2013, (4.2.1) Shear and squeeze points when setting up and folding</p> <p>- Shear and squeeze points that are created only during setting up and folding, including tipping seat actions, are acceptable, because the user can be assumed to be in control of his/her movements and to be able to cease applying the force immediately upon experiencing pain. The edges of parts moving relative to each other and creating shear and squeeze points shall be as specified in 4.1.</p> | | Not applicable |
| <p>EN 16139:2013, (4.2.2) Shear and squeeze points under influence of powered mechanism</p> <p>- With the exception of tipping seats there shall be no shear and squeeze points created by parts of the seating operated by powered mechanisms, e.g. springs and gas lifts.</p> | | Not applicable |

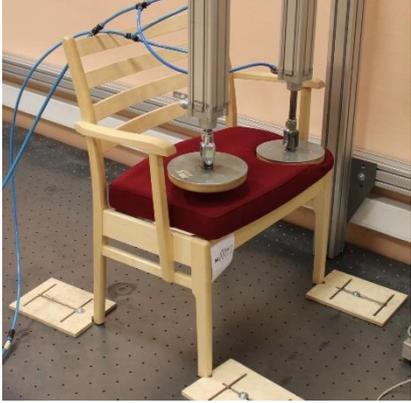
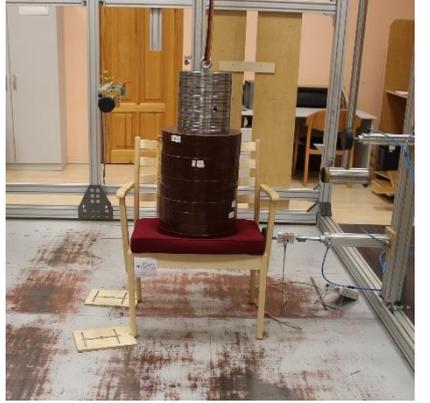
| Requirements of EN 16139:2013 | Test parameters according to EN 1728:2012 /AC:2013; EN 1022:2023 | Requirement fulfilled (+) Requirement not fulfilled (-) |
|---|--|--|
| 1 | 2 | 3 |
| EN 16139:2013, (4.2.3) Shear and squeeze points during use - There shall be no shear and squeeze points created by forces applied during normal use as well as during normal movements and actions, see Table 1. | | + |
| 4.3 Stability, EN 16139:2013 | | |
| EN 16139:2013, (4.3.1) General - The seating shall not overturn under the following conditions: a) by pressing down on the front edge of the seat surface in the median plane; b) by applying a load on the seat surface via the front corner; c) by leaning sideways on a with or without arm rest; d) by leaning against the back rest; e) by sitting on the front edge of the seat; f) by loading the foot rest. | EN 1022:2023, (7.3.1 and 7.3.2) Forward overturning: - seat force, 600 N; - horizontal force, 20 N. | + |
| | EN 1022:2023, (7.3.2) Forward overturning for seating with foot rest: - force, 600 N; - horizontal force, 20 N. | Not applicable |
| | EN 1022:2023, (7.3.3) Corner stability: - seat force, 300 N. | + |
| | EN 1022:2023, (7.3.4) Sideways overturning, all seatings without arm rests: - seat force, 600 N; - horizontal force, 20 N. | Not applicable |
| | EN 1022:2023, (7.3.5) Sideways overturning, all other seating: - arm force, 250 N; - seat force, 350 N; - horizontal force, 20 N. | + |
| | EN 1022:2023, (7.3.6) Rearwards overturning, all seating with back rests: - seat force, 600 N; - back force, 80 N. | + |
| EN 16139:2013, (4.3.2) Swivelling chairs - Requirements a) to e) are considered to be met if the seating complies with 4.3 of EN 1335-2:2009. Requirements a) to f) are considered to be met if the seating complies with EN 1022. | | Not applicable |
| EN 16139:2013, (4.4) Rolling resistance of the unloaded chair - This subclause is only applicable to single seating units fitted with castors or wheels. The unloaded seating shall not roll unintentionally. This requirement is met when: the rolling resistance is ≥ 12 N when tested in accordance with EN 1335-3:2009, 7.4; and all castors are of the same type. | | Not applicable |
| EN 16139:2013, (4.5) Safety of the construction - The following tests described in Clause 6, Table 1 are considered to be relevant to safety: Test No.: 1, 2, 4, 6, 7, 8, 9, 10, 12, 13, 14. Seating is considered to satisfy the safety requirements if, on completion of the relevant tests, the chair satisfies all requirements of Clause 5. | | |
| 5 Safety, strength and durability requirements, EN 16139:2013 | | |
| EN 16139:2013, (1.) table 1, Seat and back static load test - These safety, strength and durability requirements are fulfilled when during and after testing: a) there are no fractures of any member, joint or component; b) there are no loosening of joints intended to be rigid; c) no major structural element is significantly deformed; d) the chair fulfils its functions after removal of the test loads. | EN 1728:2012 /AC:2013, (6.4) Seat static load and back static load test: - seat force 2000 N; - back force 700 N; - cycles 10. | + |

| Requirements of EN 16139:2013 | Test parameters according to EN 1728:2012 /AC:2013; EN 1022:2023 | Requirement fulfilled (+) Requirement not fulfilled (-) |
|--|---|--|
| 1 | 2 | 3 |
| <p>EN 16139:2013, (2.) table 1, Seat front edge static load test</p> <p>- These safety, strength and durability requirements are fulfilled when during and after testing:</p> <p>a) there are no fractures of any member, joint or component;</p> <p>b) there are no loosening of joints intended to be rigid;</p> <p>c) no major structural element is significantly deformed;</p> <p>d) the chair fulfils its functions after removal of the test loads.</p> | <p>EN 1728:2012 /AC:2013, (6.5) Seat front edge static load:</p> <p>- seat force 1600 N;</p> <p>- cycles 10.</p> | + |
| <p>EN 16139:2013, (3.) table 1, Vertical static load on back</p> <p>- These safety, strength and durability requirements are fulfilled when during and after testing:</p> <p>a) there are no fractures of any member, joint or component;</p> <p>b) there are no loosening of joints intended to be rigid;</p> <p>c) no major structural element is significantly deformed;</p> <p>d) the chair fulfils its functions after removal of the test loads.</p> | <p>EN 1728:2012 /AC:2013, (6.6) Vertical load on backrest:</p> <p>- force 900 N;</p> <p>- seat load 1800 N;</p> <p>- cycles 10.</p> | + |
| <p>EN 16139:2013, (4.) table 1, Foot rest and leg rest static load test</p> <p>- These safety, strength and durability requirements are fulfilled when during and after testing:</p> <p>a) there are no fractures of any member, joint or component;</p> <p>b) there are no loosening of joints intended to be rigid;</p> <p>c) no major structural element is significantly deformed;</p> <p>d) the chair fulfils its functions after removal of the test loads.</p> | <p>EN 1728:2012 /AC:2013, (6.8) Foot rest static load test:</p> <p>- force 1600 N;</p> <p>- cycles 10.</p> | Not applicable |
| | <p>EN 1728:2012 /AC:2013, (6.9) Leg rest static load test:</p> <p>- force 1600 N;</p> <p>- cycles 10.</p> | Not applicable |
| <p>EN 16139:2013, (5.) table 1, Arm sideways static load test</p> <p>- These safety, strength and durability requirements are fulfilled when during and after testing:</p> <p>a) there are no fractures of any member, joint or component;</p> <p>b) there are no loosening of joints intended to be rigid;</p> <p>c) no major structural element is significantly deformed;</p> <p>d) the chair fulfils its functions after removal of the test loads.</p> | <p>EN 1728:2012 /AC:2013, (6.10) Arm rest sideways static load test:</p> <p>- force 900 N;</p> <p>- cycles 10.</p> | + |
| <p>EN 16139:2013, (6.) table 1, Arm downward static load test</p> <p>- These safety, strength and durability requirements are fulfilled when during and after testing:</p> <p>a) there are no fractures of any member, joint or component;</p> | <p>EN 1728:2012 /AC:2013, (6.11) Arm rest downward static load test:</p> <p>- force 900 N;</p> <p>- cycles 5.</p> | + |

| Requirements of EN 16139:2013 | Test parameters according to EN 1728:2012 /AC:2013; EN 1022:2023 | Requirement fulfilled (+) Requirement not fulfilled (-) |
|---|---|--|
| 1 | 2 | 3 |
| b) there are no loosening of joints intended to be rigid; c) no major structural element is significantly deformed; d) the chair fulfils its functions after removal of the test loads. | | |
| EN 16139:2013, (7.) table 1, Vertical upwards static load on arm rest - These safety, strength and durability requirements are fulfilled when during and after testing: a) there are no fractures of any member, joint or component; | EN 1728:2012 /AC:2013, (6.13.1) Seating which may be moved when occupied: - seat load 1200 N; - cycles 10 during ≥ 10 s. | Not applicable |
| b) there are no loosening of joints intended to be rigid; c) no major structural element is significantly deformed; d) the chair fulfils its functions after removal of the test loads. | EN 1728:2012 /AC:2013, (6.13.2) Stacking seating: - seat load 1200 N; - lift stack with max 8 chairs of max 25 kg. | Not applicable |
| EN 16139:2013, (8.) table 1, Seat and back durability test - These safety, strength and durability requirements are fulfilled when during and after testing: a) there are no fractures of any member, joint or component; b) there are no loosening of joints intended to be rigid; c) no major structural element is significantly deformed; d) the chair fulfils its functions after removal of the test loads. | EN 1728:2012 /AC:2013, (6.17) Combined seat and back durability test: - seat load 1000 N; - back load 300 N;; - cycles 200 000. | + |
| EN 16139:2013, (9.) table 1, Seat front edge durability test - These safety, strength and durability requirements are fulfilled when during and after testing: a) there are no fractures of any member, joint or component; b) there are no loosening of joints intended to be rigid; c) no major structural element is significantly deformed; d) the chair fulfils its functions after removal of the test loads. | EN 1728:2012 /AC:2013, (6.18) Seat front edge durability test: - force 800 N; - cycles 100 000. | + |
| EN 16139:2013, (10.) table 1, Arm durability test - These safety, strength and durability requirements are fulfilled when during and after testing: a) there are no fractures of any member, joint or component; b) there are no loosening of joints intended to be rigid; c) no major structural element is significantly deformed; d) the chair fulfils its functions after removal of the test loads. | EN 1728:2012 /AC:2013, (6.20) Arm rest durability test: - force 400 N; - cycles 60 000. | + |

| Requirements of EN 16139:2013 | Test parameters according to EN 1728:2012 /AC:2013; EN 1022:2023 | Requirement fulfilled (+) Requirement not fulfilled (-) |
|---|---|--|
| 1 | 2 | 3 |
| <p>EN 16139:2013, (11.) table 1, Foot rest durability test</p> <p>- These safety, strength and durability requirements are fulfilled when during and after testing:</p> <p>a) there are no fractures of any member, joint or component;</p> <p>b) there are no loosening of joints intended to be rigid;</p> <p>c) no major structural element is significantly deformed;</p> <p>d) the chair fulfils its functions after removal of the test loads.</p> | <p>EN 1728:2012 /AC:2013, (6.21) Foot rest durability test:</p> <p>- force 1000 N;</p> <p>- cycles 100 000.</p> | Not applicable |
| <p>EN 16139:2013, (12.) table 1, Leg forward static load test</p> <p>- These safety, strength and durability requirements are fulfilled when during and after testing:</p> <p>a) there are no fractures of any member, joint or component;</p> <p>b) there are no loosening of joints intended to be rigid;</p> <p>c) no major structural element is significantly deformed;</p> <p>d) the chair fulfils its functions after removal of the test loads.</p> | <p>EN 1728:2012 /AC:2013, (6.15) Leg forward static load test:</p> <p>- force 620 N;</p> <p>- seat load 1800 N;</p> <p>- cycles 10.</p> | + |
| <p>EN 16139:2013, (13.) table 1, Leg sideways static load test</p> <p>- These safety, strength and durability requirements are fulfilled when during and after testing:</p> <p>a) there are no fractures of any member, joint or component;</p> <p>b) there are no loosening of joints intended to be rigid;</p> <p>c) no major structural element is significantly deformed;</p> <p>d) the chair fulfils its functions after removal of the test loads.</p> | <p>EN 1728:2012 /AC:2013, (6.16) Leg sideways static load test:</p> <p>- force 760 N;</p> <p>- seat load 1800 N;</p> <p>- cycles 10.</p> | + |
| <p>EN 16139:2013, (14.) table 1, Seat impact test</p> <p>- These safety, strength and durability requirements are fulfilled when during and after testing:</p> <p>a) there are no fractures of any member, joint or component;</p> <p>b) there are no loosening of joints intended to be rigid;</p> <p>c) no major structural element is significantly deformed;</p> <p>d) the chair fulfils its functions after removal of the test loads.</p> | <p>EN 1728:2012 /AC:2013, (6.24) Seat impact test:</p> <p>- drop height 300 mm;</p> <p>- cycles 10.</p> | + |
| <p>EN 16139:2013, (15.) table 1, Back impact test</p> <p>- These safety, strength and durability requirements are fulfilled when during and after testing:</p> <p>a) there are no fractures of any member, joint or component;</p> <p>b) there are no loosening of joints intended to be rigid;</p> | <p>EN 1728:2012 /AC:2013, (6.25) Back impact test:</p> <p>- drop height 330/48 mm;</p> <p>- cycles 10.</p> <p>or:</p> <p>EN 1728:2012 /AC:2013, (6.28) Backward fall test</p> <p>- < 30N;</p> <p>- drop on rubber;</p> | + (EN 1728:2012 /AC:2013, (6.28) Backward fall test) |

| Requirements of EN 16139:2013 | Test parameters according to EN 1728:2012 /AC:2013; EN 1022:2023 | Requirement fulfilled (+) Requirement not fulfilled (-) |
|---|---|--|
| 1 | 2 | 3 |
| c) no major structural element is significantly deformed; d) the chair fulfils its functions after removal of the test loads. | - cycles 10. | |
| EN 16139:2013, (16.) table 1, Arm impact test - These safety, strength and durability requirements are fulfilled when during and after testing: a) there are no fractures of any member, joint or component; b) there are no loosening of joints intended to be rigid; c) no major structural element is significantly deformed; d) the chair fulfils its functions after removal of the test loads. | EN 1728:2012 /AC:2013, (6.26) Arm impact test: - drop height 330/48 mm; - cycles 10. | + |
| EN 16139:2013, (17.) table 1, Drop test - These safety, strength and durability requirements are fulfilled when during and after testing: a) there are no fractures of any member, joint or component; b) there are no loosening of joints intended to be rigid; c) no major structural element is significantly deformed; d) the chair fulfils its functions after removal of the test loads. | EN 1728:2012 /AC:2013, (6.27.1) Drop test: - drop height 450 mm; - cycles 10. | Not applicable |
| EN 16139:2013, (18.) table 1, Auxiliary writing surface static load test - These safety, strength and durability requirements are fulfilled when during and after testing: a) there are no fractures of any member, joint or component; b) there are no loosening of joints intended to be rigid; c) no major structural element is significantly deformed; d) the chair fulfils its functions after removal of the test loads. | EN 1728:2012 /AC:2013, (6.14) Vertical static load test on Auxiliary writing surface: - force 300 N; - cycles 10. | Not applicable |
| EN 16139:2013, (19.) table 1, Auxiliary writing surface durability test - These safety, strength and durability requirements are fulfilled when during and after testing: a) there are no fractures of any member, joint or component; b) there are no loosening of joints intended to be rigid; c) no major structural element is significantly deformed; d) the chair fulfils its functions after removal of the test loads. | EN 1728:2012 /AC:2013, (6.22) Durability test on Auxiliary writing surface: - force 150 N; - cycles 20 000. | Not applicable |
| EN 16139:2013, (7) Information for use - Information for use shall be available in the language of the country in which it will be delivered to the end user. It shall contain at least the following details: a) information regarding the intended use (see Annex B); b) if the chair is fitted with adjusting mechanisms: instruction for operating the adjusting mechanisms; | | + (evaluated in English) |

| Requirements of EN 16139:2013 | Test parameters according to EN 1728:2012 /AC:2013; EN 1022:2023 | Requirement fulfilled (+) Requirement not fulfilled (-) |
|--|---|--|
| 1 | 2 | 3 |
| c) assembly instructions, where applicable; d) instruction for the care and maintenance of the chair; e) if the seating is fitted with castors: information on the choice of castors in relation to the floor surface; f) if the seating is fitted with adjustment mechanisms comprising an energy accumulator, an additional note is required pointing out that only instructed personnel may replace and maintain adjustment mechanisms containing energy accumulators. | | |
|  |  |  |
| <p>Figure 3: Seat front edge durability test: - force 800 N; - cycles 100 000.</p> | <p>Figure 4: Arm impact test: - drop height 330/48 mm; - cycles 10.</p> | <p>Figure 5: Leg sideways static load test: - force 760 N; - seat load 1800 N; - cycles 10.</p> |

6. Testing laboratory comments summary

Pan bariatric chair w/armrests “HB6870” fulfills safety, stability, strength and durability requirements according to EN 16139:2013/AC:2013 “Furniture - Strength, durability and safety - Requirements for non-domestic seating”. Type of use – extreme, test parameters - L2.

Date of issue: 16.01.2024.

Prepared by
 K.Kozlovska
 V.Jakovļevs

Reviewed by



(signature and name)

K.Būmanis

THIS DOCUMENT IS SIGNED BY SECURE ELECTRONIC SIGNATURE AND CONTAINS A TIME STAMP
 (Signature validity can be checked: <https://www.eparaksts.lv/en>)

The results refer only to these test objects. This test report may not be reproduced other than in full, excepted with the prior written approval of Testing laboratory of the Forest and Wood Product Research and Development Institute